


# Legrand cabling system LCS<sup>3</sup> fibre optic

## 19" fibre optic drawers and mini-splicer



New LCS<sup>3</sup> system

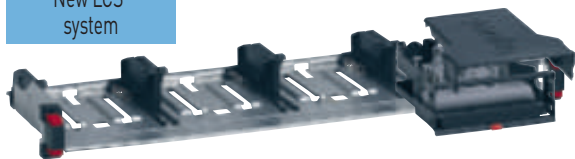

0 321 40 + 0 321 41



Panel 0 321 40 to be equipped with 4 cassettes 0 321 43



0 321 41



0 321 43



0 321 46



0 322 00

Pack	Cat.Nos	Modular 19" panel to be equipped with cassettes
1	0 321 40	To be equipped with maximum 4 automatic extraction cassettes Complete with new generation Quick-Fix for automatic mounting (no screws required) on the risers of cabinets or enclosures Maximum capacity either 96 LC connectors, 48 SC connectors or 24 ST connectors Depth 190 mm, height 1 U

Pack	Cat.Nos	Optic drawer cassettes
1	0 321 41	To be installed directly in the optic panel Cat.No 0 321 40 Removable cassette Extraction by simple pressure of the cassette, making installation and maintenance easier
1	0 321 41	<b>Fibre optic splice cassette</b> Accepts all modular fibre optic blocks
1	0 337 55	<b>Copper cassette to be equipped</b> Accepts 6 cat. 5e, cat. 6 and cat. 6a connectors
1	0 321 42	<b>MTP<sup>1</sup> preterminated cassette (MPO compatible)</b> Front and rear extraction High performance cassette, low insertion loss <0.35 dB
1	0 321 42	Multimode OM4 cassette (50/125 µm) 24 filaments LC OM4 Type A/C
1	0 321 43	Multimode OM4 cassette (50/125 µm) 12 SC OM4 Type A/C
1	0 321 44	Single-mode OS2 cassette (9/125 µm) type OS2 24 LC OS2 Type A/C
1	0 321 45	Single-mode OS2 cassette (9/125 µm) 12 SC OS2 Type A/C
1	0 337 57	<b>Blanking cassette</b> To be used for blanking the panel
1	0 321 33	<b>Adaptors</b> Single-mode 4 MTP <sup>1</sup> adaptor (installation in cassette Cat.No 0 321 41)
1	0 321 34	Multimode 4 MTP <sup>1</sup> adaptor (installation in cassette Cat.No 0 321 41)

1: MTP is a registered trademark of US Conec Ltd

Pack	Cat.Nos	Accessories for 19" panel to be equipped with cassettes
1	0 321 46	<b>Rear cable management accessory</b> For installation on panel Cat.No 0 321 40
1	0 321 47	<b>Cord management kit (guide/support/door)</b> For installation on panel Cat.No 0 321 40; 2 side cord management and front door with integrated marking to ensure correct front and side cord management Cord support to be installed on the cassette to make side passages easier

Pack	Cat.Nos	Smart splicer
1	0 322 00	<b>For pigtailed</b> Compact and robust tool, excellent hand grip, easy to transport. Allows the fusion and protection of pigtailed, state report of insertion losses (IL typical = 0,1 dB) by insertion led control (IL) USB port to download the IL data Composition: - 1 splicer Dim: 95 x 132 x 71 mm Weight: 550 gr IP 50 - 1 precision cleaver - 1 adaptor for different LC and SC standards - 1 lithium battery (autonomy: 80 splice and protection cycles) - Power cord - 2 fiber holders - 900 µm 1 splicer kit for pigtailed
1	0 322 02	<b>Spare parts</b> Fiber holder repla 900 microns
1	0 322 03	Fiber holder 250 microns
1	0 322 04	1 Cord LC-LC APC
1	0 322 05	1 Cord LC-LC
1	0 322 06	1 Cord LC-SC APC
1	0 322 07	1 Cord LC-SC
1	0 322 08	1 adaptor LC-LC
1	0 322 09	1 adaptor SC-SC
1	0 322 76	<b>Fiber optic accessories</b> Fiber stripper
1	0 322 77	Wipes
1	0 322 78	Cleaning spray bottle